

Nonlinear iterative solvers for unsteady Navier-Stokes equations

Philipp Birken and Antony Jameson

This paper is dedicated to Gene Golub.

ABSTRACT. The application of nonlinear schemes like dual time stepping as preconditioners in matrix-free Newton-Krylov-solvers is considered and analyzed. We provide a novel formulation of the left preconditioned operator that says it is in fact linear in the matrix-free sense, but changes the Newton scheme. This allows to get some insight in the convergence properties of these schemes which are demonstrated through numerical results.

1. Introduction

During the last decades, a lot of attention has been paid to steady flows with the result that fast solvers exist for this type of flows. Thus, attention is turning to the unsteady Navier-Stokes-equations. There, implicit schemes for time integration are much more interesting than explicit schemes, which are then severely restrained by the CFL condition. Usually, A-stable methods like BDF-2 are employed. For implicit schemes, their applicability is determined by the availability of fast solvers for the arising large nonlinear equation systems. However, it has to be said that currently, no fast solver exists for this type of flow.

As was shown by Jameson and Caughey in [CJ01], the solution of steady Euler flows is today possible in three to five multigrid steps. Thus, two dimensional flows around airfoils can be solved on a PC in a matter of seconds. The solution of the steady RANS equations is more difficult and takes about fifty steps. Using dual time stepping, the above mentioned multigrid method can be used for unsteady flows. This results in a good method for Euler flows, but for the Navier-Stokes equations, dual time stepping was observed to be very slow for some cases, in particular for turbulent flows on high aspect ratio grids.

The alternative to this is to use Newton's method, which requires the solution of large sparse linear equation systems, usually by preconditioned Krylov subspace

1991 *Mathematics Subject Classification*. Primary 54C40, 14E20; Secondary 46E25, 20C20.

Key words and phrases. Keywords: Unsteady flows, Preconditioning, Newton-Krylov.

The first author was funded by the Deutsche Forschungsgemeinschaft as part of the SFB TRR-30.

©0000 (copyright holder)

methods like GMRES or BiCGSTAB. Due to the excessive memory requirements for Navier-Stokes flows in three dimensions, matrix-free methods that circumvent computation and storage of the jacobian are an attractive alternative, see the overview paper by Knoll and Keyes [KK04]. Newton's method suffers from the problem that convergence is guaranteed only in a neighborhood of the solution and that the linear equation systems become more difficult to solve, the larger the chosen time step is.

To improve upon the existing methods, several approaches have been tried. Jameson and Hsu suggest in [HJ02] to use one step of the ADI method, followed by few multigrid steps for the dual time problem, which is similar to using one Newton step, followed by dual time stepping. Bijl and Carpenter on the other hand use k_1 dual time steps up front, followed by k_2 steps of Newton's methods, see [BC05]. Both report an improvement in comparison to the base pure dual time stepping scheme. Noskov et. al. look at the prospects of using ADI-schemes as preconditioners [NBS07].

In this paper, we will look at the idea of using dual time stepping as nonlinear preconditioner for the linear solver. This was first tried by Wigton, Yu and Young in 1985 [WYY85], lately by Mavriplis [Mav02] and Bijl and Carpenter [BC05]. Here, we look at the novel formulation for the nonlinearly left preconditioned operator in the matrix-free case presented in [BJ], thus obtaining new insight into those methods. Furthermore, we look at the numerical performance of right preconditioning.

2. The governing equations

The Navier-Stokes equations are a second order system of conservation laws (mass, momentum, energy) modeling viscid compressible flow. We consider the two dimensional case, written in conservative variables density ρ , momentum $\mathbf{m} = \rho\mathbf{v}$ and energy per unit volume ρE :

$$\begin{aligned} \partial_t \rho + \nabla \cdot \mathbf{m} &= 0, \\ \partial_t m_i + \sum_{j=1}^2 \partial_{x_j} (m_i v_j + p \delta_{ij}) &= \frac{1}{Re} \sum_{j=1}^2 \partial_{x_j} S_{ij}, \quad i = 1, 2, \\ \partial_t (\rho E) + \nabla \cdot (H\mathbf{m}) &= \frac{1}{Re} \sum_{j=1}^2 \partial_{x_j} \left(\sum_{i=1}^2 S_{ij} v_i - \frac{1}{Pr} W_j \right). \end{aligned}$$

Here, \mathbf{S} represents the viscous shear stress tensor and W the heat flux. As the equation are dimensionless, the Reynoldsnumber Re and the Prandtlnumber Pr appear. The equations are closed by the equation of state for the pressure $p = (\gamma - 1)\rho e$.

3. The Method

The standard method to solve this type of equations are finite volume methods. We consider some general finite volume space discretization, which is represented by the grid function $\mathbf{R}(\mathbf{w})$, which acts on the vector of all conserved variables \mathbf{w} :

$$(\mathbf{V}\mathbf{w})_t + \mathbf{R}(\mathbf{w}) = 0,$$

where the diagonal matrix \mathbf{V} represents the volume of the cells of the grid. As time integrator we use BDF-2 which results for a nonmoving grid and a fixed timestep Δt in the equation

$$\frac{\mathbf{V}}{\Delta t} \left(\frac{3}{2} \mathbf{w}^{n+1} - \frac{4}{2} \mathbf{w}^n + \frac{1}{2} \mathbf{w}^{n-1} \right) + \mathbf{R}(\mathbf{w}^{n+1}) = \mathbf{0}.$$

Multiplying by two, we define the function $\mathbf{F}(\mathbf{w})$ to obtain the nonlinear equation system for the unknown $\mathbf{w} = \mathbf{w}^{n+1}$

$$(3.1) \quad \mathbf{F}(\mathbf{w}) = \frac{\mathbf{V}}{\Delta t} (3\mathbf{w} - 4\mathbf{w}^n + \mathbf{w}^{n-1}) + 2\mathbf{R}(\mathbf{w}) = \mathbf{0}.$$

3.1. Newton-Krylov-Method. The numerical solution of the above nonlinear equation system can be done using Newton's method. One Newton step is given by:

$$\left(\frac{3}{\Delta t} \mathbf{V} + 2 \frac{\partial \mathbf{R}(\mathbf{w})}{\partial \mathbf{w}} \right) \Big|_{\mathbf{w}^{(k)}} \Delta \mathbf{w} = -\mathbf{F}(\mathbf{w}^{(k)})$$

$$\mathbf{w}^{(k+1)} = \mathbf{w}^{(k)} + \Delta \mathbf{w}.$$

We solve this linear equation system with system matrix $\mathbf{A} = \left(\frac{3}{\Delta t} \mathbf{V} + 2 \frac{\partial \mathbf{R}(\mathbf{w})}{\partial \mathbf{w}} \right) \Big|_{\mathbf{w}^{(k)}}$ using matrix free Krylov subspace methods. These approximate the solution to the linear system in the Krylov subspace

$$\mathbf{x}_0 + \text{span}\{\mathbf{r}_0, \mathbf{A}\mathbf{r}_0, \mathbf{A}^2\mathbf{r}_0, \dots, \mathbf{A}^{m-1}\mathbf{r}_0\}.$$

Since Krylov subspace methods never need the matrix \mathbf{A} explicitly, but only matrix-vector products, we circumvent the expensive computation of the Jacobian to obtain a matrix-free method. This is done by approximating all matrix vector products by finite difference approximations of directional derivatives:

$$\mathbf{A}\mathbf{q} \approx \frac{\mathbf{F}(\mathbf{w}^{(k)} + \epsilon \mathbf{q}) - \mathbf{F}(\mathbf{w}^{(k)})}{\epsilon} = \frac{3\mathbf{V}}{\Delta t} \mathbf{q} + 2 \frac{\mathbf{R}(\mathbf{w}^{(k)} + \epsilon \mathbf{q}) - \mathbf{R}(\mathbf{w}^{(k)})}{\epsilon}.$$

For epsilon, we use $\epsilon = \sqrt{\frac{\epsilon_{\text{machine}}}{\|\mathbf{q}\|_2}}$ following [QLS00]. As reported by several authors, GMRES-like methods as GCR that have an optimality property are more suitable for this approach than methods like BiCGSTAB with short recurrences.

- $\mathbf{x}_0 = \mathbf{0}$, $\mathbf{r}_0 = \mathbf{b} - \mathbf{A}\mathbf{x}_0$, $k=-1$.
- while $\|\mathbf{r}_k\|_2 > \text{tol}$ do
 - $k = k + 1$
 - $\mathbf{p}_k = \mathbf{r}_k$
 - $\mathbf{q}_k = \mathbf{A}\mathbf{p}_k$
 - for $i = 0, 1, \dots, k-1$ do
 - $\alpha_i = \mathbf{q}_i^T \mathbf{q}_k$, $\mathbf{q}_k = \mathbf{q}_k - \alpha_i \mathbf{q}_i$, $\mathbf{p}_k = \mathbf{p}_k - \alpha_i \mathbf{p}_i$
 - endfor
 - $\mathbf{q}_k = \mathbf{q}_k / \|\mathbf{q}_k\|_2$, $\mathbf{p}_k = \mathbf{p}_k / \|\mathbf{q}_k\|_2$
 - $\mathbf{x}_{k+1} = \mathbf{x}_k + \mathbf{p}_k \mathbf{q}_k^T \mathbf{r}_k$
 - $\mathbf{r}_{k+1} = \mathbf{r}_k - \mathbf{q}_k \mathbf{q}_k^T \mathbf{r}_k$
- endwhile

The GCR algorithm is iterated until the relative linear residual has dropped by some factor, furthermore it is possible to restart after a fixed number of iterations to bound the memory needed. Newton is iterated until a maximal number of steps has been performed or the norm of $\mathbf{F}(\mathbf{w}^{(k)})$ is below some threshold.

3.2. Dual Time stepping. The dual time stepping scheme solves the equation system (3.1) by adding a pseudo time derivative and computing the steady state of the following equation system:

$$\frac{\partial \mathbf{w}}{\partial t^*} + \mathbf{F}(\mathbf{w}) = \mathbf{0}.$$

This is done using the nonlinear multigrid method for the computation of steady flows of Jameson et al. [Jam04]. There, two special Runge-Kutta schemes for the convective and the dissipative fluxes, which have large stability regions, are used as a smoother. The prolongation \mathbf{Q} is done using bilinear interpolation and the restriction by using volume-weighted averages of the entries of \mathbf{w} . Convergence is accelerated by local time stepping and residual averaging. Then, a W-cycle with four or five grid levels is performed.

This results in a very fast method for Euler flows, which needs only three to five multigrid steps per time step [CJ01]. For Navier-Stokes flows, this is significantly slower, in particular for high aspect ratio grids and turbulent flows, where sometimes more than a hundred steps are needed for convergence.

4. Left Preconditioning

The convergence speed of Krylov subspace methods can and has to be significantly improved using preconditioners. A preconditioner \mathbf{P}^{-1} is usually a linear operator that is an approximation of \mathbf{A}^{-1} . First, we have left preconditioning:

$$\mathbf{P}^{-1}\mathbf{A}\mathbf{x} = \mathbf{P}^{-1}\mathbf{b},$$

and the Krylov subspace is changed to

$$\mathbf{x}_0 + \text{span}\{\mathbf{P}^{-1}\mathbf{r}_0, \mathbf{P}^{-1}\mathbf{A}\mathbf{P}^{-1}\mathbf{r}_0, (\mathbf{P}^{-1}\mathbf{A})^2\mathbf{P}^{-1}\mathbf{r}_0, \dots, (\mathbf{P}^{-1}\mathbf{A})^{m-1}\mathbf{P}^{-1}\mathbf{r}_0\}.$$

Here, we will use nonlinear schemes like dual time stepping as preconditioners. This was first tried by Wigton, Yu and Young in 1985 [WYY85], lately by Mavriplis [Mav02] and Bijl and Carpenter [BC05]. Following those, we define the nonlinear preconditioner for the matrixfree method via

$$(4.1) \quad -\mathbf{P}^{-1}\mathbf{F}(\mathbf{x}) = \mathbf{N}(\mathbf{x}) - \mathbf{x}.$$

Since \mathbf{N} is nonlinear, we expect \mathbf{P}^{-1} to be changing with every step, so the space in which the Krylov subspace method works would be

$$\mathbf{x}_0 + \text{span}\{\mathbf{P}_0^{-1}\mathbf{r}_0, \mathbf{P}_1^{-1}\mathbf{A}\mathbf{P}_0\mathbf{r}_0, \mathbf{P}_2^{-1}\mathbf{A}\mathbf{P}_1^{-1}\mathbf{A}\mathbf{P}_0^{-1}\mathbf{r}_0, \dots\}.$$

This is in general not a Krylov subspace. However, for the matrix-free method we have

$$\mathbf{P}^{-1}\mathbf{A}\mathbf{q} = \frac{\mathbf{P}^{-1}\mathbf{F}(\mathbf{w}^{(k)} + \epsilon\mathbf{q}) - \mathbf{P}^{-1}\mathbf{F}(\mathbf{w}^{(k)})}{\epsilon}.$$

For the first term we have

$$-\mathbf{P}^{-1}\mathbf{F}(\mathbf{w}^{(k)} + \epsilon\mathbf{q}) = \mathbf{N}(\mathbf{w}^{(k)} + \epsilon\mathbf{q}) - \mathbf{w}^{(k)} - \epsilon\mathbf{q}$$

and we obtain

$$\mathbf{P}^{-1}\mathbf{A}\mathbf{q} = \frac{-\mathbf{N}(\mathbf{w}^{(k)} + \epsilon\mathbf{q}) + \mathbf{w}^{(k)} + \epsilon\mathbf{q} + \mathbf{N}(\mathbf{w}^{(k)}) - \mathbf{w}^{(k)}}{\epsilon}.$$

Now, in the matrix free sense, this is nothing but

$$(4.2) \quad \mathbf{P}^{-1}\mathbf{A}\mathbf{q} = \left(\mathbf{I} - \frac{\partial\mathbf{N}}{\partial\mathbf{w}}\right)\Big|_{\mathbf{w}^{(k)}}\mathbf{q}.$$

Thus this is not a nonlinear, but a linear operator and may be applied to any Krylov subspace method without changes. We also obtain a representation of the preconditioner: $\mathbf{P}^{-1} = \left(\mathbf{I} - \frac{\partial\mathbf{N}}{\partial\mathbf{w}}\right)\Big|_{\mathbf{w}^{(k)}}\mathbf{A}^{-1}$.

However, the preconditioned right hand side is slightly off. In the current method, the definition of the preconditioner is applied when computing the preconditioned right hand side:

$$-\mathbf{P}^{-1}\mathbf{F}(\mathbf{w}^{(k)}) = \mathbf{N}(\mathbf{w}^{(k)}) - \mathbf{w}^{(k)}.$$

But, as we just saw, the correct thing would be to apply (4.2), resulting in

$$(4.3) \quad -\left(\mathbf{I} - \frac{\partial\mathbf{N}}{\partial\mathbf{w}}\right)\mathbf{A}^{-1}\mathbf{F}(\mathbf{w}^{(k)}) = \left(\mathbf{I} - \frac{\partial\mathbf{N}}{\partial\mathbf{w}}\right)\Delta\mathbf{w}^{(k)} = \mathbf{w}^{(k+1)} - \mathbf{w}^{(k)} - \frac{\partial\mathbf{N}}{\partial\mathbf{w}}\Delta\mathbf{w}^{(k)}.$$

Note that this cannot be fixed easily since $\mathbf{w}^{(k+1)}$ is an unknown. One approach would now be to approximate the right hand side of (4.3), but the most reasonable approximation is $\mathbf{w}^{(k)}$ and then we would end up with a zero right hand side and no update for Newton.

We will now use the novel formulation (4.2) to look more closely at the properties of the new method. In particular, it becomes clear that the preconditioned operator $\mathbf{I} - \frac{\partial\mathbf{N}}{\partial\mathbf{w}}\Big|_{\mathbf{w}^{(k)}}$ is not necessarily better than \mathbf{A} as far as convergence is concerned. For the special case of the dual time stepping method, the preconditioner is equal to the original value plus an update from the multigrid method: $\mathbf{N}(\mathbf{w}) = \mathbf{w} + \mathbf{M}\mathbf{G}(\mathbf{w})$. We thus obtain

$$\mathbf{I} - \frac{\partial\mathbf{N}}{\partial\mathbf{w}} = \frac{\partial\mathbf{M}\mathbf{G}}{\partial\mathbf{w}}.$$

If the dual time stepping stalls, for example because we are close to a steady state, this is close to zero and may be ill conditioned and thus hinder convergence.

5. Right Preconditioning

Another alternative is right preconditioning, which corresponds to

$$\mathbf{A}\mathbf{P}^{-1}\mathbf{y}, \quad \mathbf{x} = \mathbf{P}^{-1}\mathbf{y}.$$

This uses the same Krylov subspace, but after the iteration is finished, the solution has to be transformed back. Right preconditioning in the matrix-free case becomes

$$\begin{aligned} \mathbf{A}\mathbf{P}^{-1}\mathbf{q} &\approx \frac{\mathbf{F}(\mathbf{w}^{(k)} + \epsilon\mathbf{P}^{-1}\mathbf{q}) - \mathbf{F}(\mathbf{w}^{(k)})}{\epsilon} \\ &= \frac{3\mathbf{V}}{\Delta t}\mathbf{P}^{-1}\mathbf{q} + 2\frac{\mathbf{R}(\mathbf{w}^{(k)} + \epsilon\mathbf{P}^{-1}\mathbf{q}) - \mathbf{R}(\mathbf{w}^{(k)})}{\epsilon}, \end{aligned}$$

which means that before applying \mathbf{A} , we have to apply the preconditioner to \mathbf{q} . In the nonlinear case the following problems occur:

- (1) GMRES uses basisvectors of the solution space. We don't know how to apply multigrid to something like $\Delta\mathbf{w}$.
- (2) Since \mathbf{P}^{-1} might be variable, we do not really know what the proper backtransformation would be.

The second problem is solved by the flexible GMRES method [Saa93], but not the first. However, both problems are solved by GMRES-* [vdVV94]. The right preconditioner is represented by the *, which is applied by replacing the line $\mathbf{p}_k = \mathbf{r}_k$ in the GCR algorithm with the application of the preconditioner to \mathbf{r}_k and the storing of the result in \mathbf{p}_k . Thus, the preconditioner works with residualvectors and nonlinear right preconditioning is applied via:

$$\mathbf{P}^{-1}\mathbf{r}_m \approx \mathbf{P}^{-1}\mathbf{F}(\mathbf{w}^{(k)} + \mathbf{x}_m) = \mathbf{w}^{(k)} + \mathbf{x}_m - \mathbf{N}(\mathbf{w}^{(k)} + \mathbf{x}_m).$$

This is a truly nonlinear method, which does not have the presented problem of the left preconditioner of changing the right hand side of the Newton scheme.

6. Numerical Experiments

Our basic multigrid solver is UFLO103 developed by Jameson et. al. As numerical flux function, we employ the central scheme of Jameson, Schmidt and Turkel (JST-scheme).

6.1. Effect on linear solver. At first we consider the effect of the nonlinear preconditioner on the linear iterative scheme. The first test case is the computation of the steady state around the NACA0012 airfoil at Mach 0.796 and zero angle of attack.

At first, we consider viscous flow on a 256×64 mesh. In an initial phase, we perform 20 steps of the steady state solver. Then, we switch to the instationary solver, so that we are still in a phase of the computation where instationary effects are present. In figure 1, the convergence history of different solvers for the first linear system to be solved is shown. We iterate until the norm of the residual has dropped by three orders of magnitude. We can see that the nonlinear preconditioner improves the convergence speed significantly, whereas the unpreconditioned solver stagnates. Right preconditioning is slightly better than no preconditioning, but not much.

As a second test case, we consider Euler flow on a 192×32 mesh. where we have computed the steady state already and the steady state multigrid solvers has slowed down (NACA0012, Mach 0.796). Again we show the convergence history for the first linear system to be solved. It can be seen in figure 2 that now, the left preconditioned scheme is not an improvement over the unpreconditioned scheme. Apparently, $\mathbf{N}(\mathbf{w})$ is close to the identity. The right preconditioned scheme is even worse.

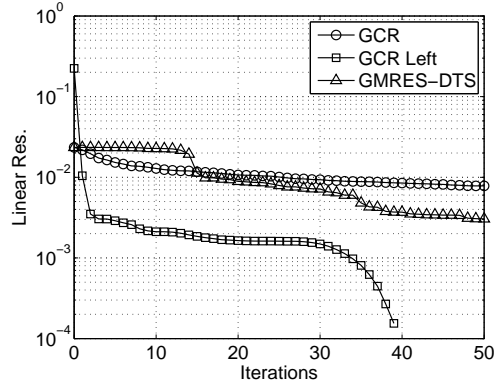


FIGURE 1. Linear Res. vs. Iter. for one system for unsteady viscous flow

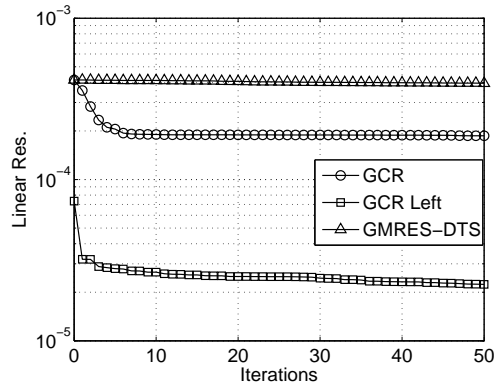


FIGURE 2. Linear Residual vs. Iterations for one system for stationary Euler flow

6.2. Effect on nonlinear solver. We now consider the effect of left preconditioning on Newton convergence. As we saw from the analysis, the nonlinear left preconditioner changes the right hand side of the linear system, so that the preconditioned system is no longer equivalent to the original one. While we saw in the first example that left preconditioning is beneficial for convergence of the linear solver in the relevant case of nonsteady flowfields, the question arises whether this affects Newton convergence. To test this, we consider one time step and look at the nonlinear residual to get an indication of the convergence of the Newton scheme.

The left picture shows one time step for the Euler flow around the NACA0012 profile from the last example, whereas the second picture shows one time step for viscous flow around a cylinder at Reynolds number 100.000 and freestream Mach number 0.25, before the onset of turbulence. A 512×64 mesh was used for the second case.

As we can see, if left preconditioning is used, the residual curve stalls. This is only an indicator for the convergence of the Newton scheme, but cannot be

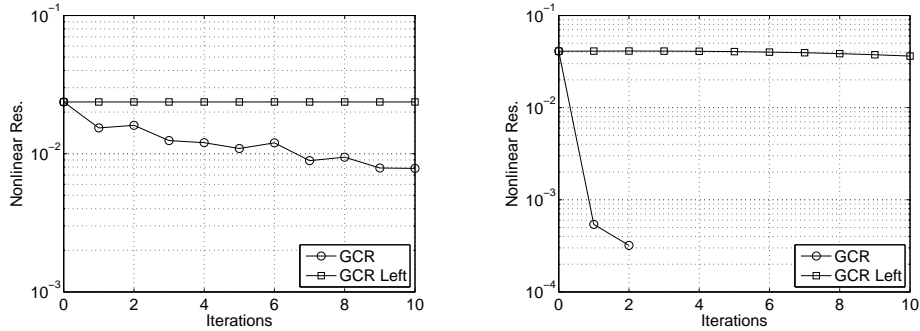


FIGURE 3. Convergence of Newton scheme for Euler flow (left) and for viscous flow around cylinder (right)

considered good. However, it should be mentioned that for the cases we tested, the left preconditioned scheme did provide correct results.

7. Conclusions

We found a novel formulation of the nonlinear preconditioned operator that allows to investigate the properties of such schemes better. In particular, it turns out that the left preconditioned scheme can be seen as a linear preconditioner in the matrix-free sense that changes the right hand side of the Newton scheme in a nonequivalent way, leading to stall of the residual curve of the Newton scheme. The analysis predicts specific convergence behavior for the linear and the nonlinear iterative solver which is confirmed by numerical experiments.

Acknowledgements

We'd like to thank Dr. Nawee Butsunorn for his support in debugging the code and his helpful comments.

References

- [BC05] H. Bijl and M. H. Carpenter, *Iterative solution techniques for unsteady flow computation using higher order time integration techniques*, Int. J. Numer. Meth. Fluids **47** (2005), 857–862.
- [BJ] P. Birken and A. Jameson, *On nonlinear preconditioners in newton-krylov-methods for unsteady flows*, Int. J. Num. Meth. Fluids, submitted.
- [CJ01] D. A. Caughey and A. Jameson, *How many steps are required to solve the euler equations of steady compressible flow: In search of a fast solution algorithm*, AIAA-Paper **2001-2673** (2001).
- [HJ02] J. Hsu and A. Jameson, *An implicit-explicit hybrid scheme for calculating complex unsteady flows*, AIAA Paper 2002-0714 (2002).
- [Jam04] A. Jameson, *Aerodynamics*, Encyclopedia of Computational Mechanics, Volume 3: Fluids (E. Stein, R. de Borst, and T. J.R. Hughes, eds.), John Wiley and Sons, 2004, pp. 325–406.
- [KK04] D.A. Knoll and D.E. Keyes, *Jacobian-free Newton-Krylov methods: a survey of approaches and applications*, J. Comp. Phys. **193** (2004), 357–397.
- [Mav02] D. J. Mavriplis, *An assessment of linear versus nonlinear multigrid methods for unstructured mesh solvers*, J. Comp. Phys. **175** (2002), 301–325.

- [NBS07] M. Noskov, M. Benzi, and M. D. Smooke, *An implicit compact scheme solver for multidimensional multicomponent flows*, *Computers & Fluids* **36** (2007), 376–397.
- [QLS00] N. Qin, D. K. Ludlow, and S. T. Shaw, *A matrix-free preconditioned Newton/GMRES method for unsteady Navier-Stokes solutions*, *Int. J. Num. Meth. Fluids* **33** (2000), 223–248.
- [Saa93] Y. Saad, *A flexible inner-outer preconditioned GMRES algorithm*, *SIAM J. Sci. Comput.* **14** (1993), no. 2, 461–469.
- [vdVV94] H. A. van der Vorst and C. Vuik, *Gmresr: a family of nested gmres methods*, *Num. Lin. Algebra with Appl.* **1(4)** (1994), 369–386.
- [WYY85] L. B. Wigton, N. J. Yu, and D. P. Young, *Gmres acceleration of computational fluid dynamics codes*, *AIAA Paper* **A85-40933** (1985).

DEPARTMENT OF MATHEMATICS, UNIVERSITY OF KASSEL, HEINRICH-PLETT-STR. 40, D-34132 KASSEL, GERMANY

E-mail address: `birken@mathematik.uni-kassel.de`

DEPARTMENT OF AERONAUTICS & ASTRONAUTICS, STANFORD UNIVERSITY, STANFORD, CA 94305, USA

E-mail address: `jameson@baboon.stanford.edu`